



VULCAN PLASTIC FV2P

TUNED SOUND ELECTROPNEUMATIC HORN AVVISATORE ELETTROPNEUMATICO SUONO ACCORDATO

Electric compressor: FC1 12 or 24V.
Aluminium painted or chromed body with ABS resin trumpets. A high profile accessory for van, off-roads and vehicles not equipped with compressed air system. Two tuned notes. Deep and powerful sound.
R28 ECE-ONU

Elettrocompressore FC1 12 o 24V.
Base in alluminio verniciata o cromata con cornetti in ABS. Un accessorio di alto profilo per van, fuoristrada e veicoli sprovvisti dell'impianto di aria compressa. Due note accordate. Suono potente e profondo.
R28 ECE-ONU.

TECHNICAL FEATURES / CARATTERISTICHE TECNICHE

12V


24V

Vulcan Plastic Chromed - Item code /Codice prodotto		1010203	1010204
Vulcan Plastic Aluminium - Item code /Codice prodotto		1010208	1010209
Nominal voltage / Voltaggio nominale		12 Vdc	24 Vdc
Current absorption / Assorbimento		16÷20 A	8÷10 A
Sound level / Livello sonoro	118 dB (A)		
Frequency/ Frequenza	H Tone/tono H - 510Hz L Tone/tono L - 410Hz		
Durability/Durata	50000 cycles/ <i>cicli</i> (1sec ON, 4sec OFF)		
Continuous blowing/Durata in continuo	max2.5 min		
Electrical insulation/Isolamento elettrico	500 Vdc		
Weight / Peso	1020 gr		
Trumpets - 2 black ABS resin trumpets <i>Cornetti - n°2 in ABS nero</i>			
Main applications: Vans and off-road vehicles <i>Applicazioni principali: Van, fuoristrada</i>			
Connections/Conessioni			
Electrical	2 blades connectors 6.3x0.8mm		
<i>Elettriche</i>	<i>2 connettori a lama 6.3x0.8mm</i>		
Pneumatic	Transparent PVC pipe		
<i>Pneumatiche</i>	<i>Tubo in PVC trasparente</i>		

Technical drawing of the trumpet assembly. The drawing shows two views: a side view and a front view. The side view shows the trumpet with a flared bell (diameter 83 mm) and a mounting bracket. Dimensions include a total length of 325 mm, a bell diameter of 83 mm, a mounting bracket width of 20 mm, a mounting bracket height of 95 mm, and a mounting bracket base width of 65 mm. The front view shows the trumpet with a flared bell (diameter 68 mm) and a mounting bracket. Dimensions include a total length of 168 mm, a bell diameter of 68 mm, a mounting bracket width of 65 mm, and a mounting bracket height of 165 mm. The mounting bracket is labeled "fixing base" and "base di fissaggio".

MOUNTING: Install the horn on a rigid surface using the supplied hardware, away from heat sources and water splashes.

MONTAGGIO: fissare l'unità acustica su una superficie rigida con viti in dotazione, lontano da fonti di calore e spruzzi d'acqua.

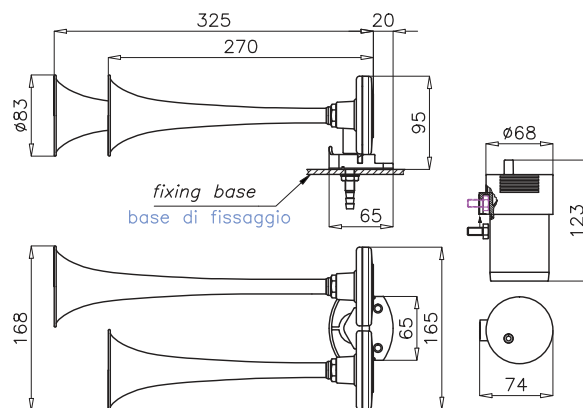

PACKING/IMBALLO: Box